

INSTALLATION INSTRUCTIONS

Item#4416-281 (New. 01/13/2015)

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

HANGING THE FIXTURE (Fig. 1)

1. Carefully remove the fixture from the carton and check that all parts are included as shown in the illustration.
2. Shut off power at the circuit breaker and remove the old fixture including the mounting hardware.
3. Determine the hanging height desired and connect down rods (J&K) to nipple (S), then secure the swivels (I) to the top of the down rods (J).
4. Next place canopy (H), metal plate (S), lock washer (C) and washer (D) over the top of swivel (I). Fasten with hex nut (E) by using the wrench (F) provided.
5. Position the mounting plate (A) on the ceiling, and mark the location of the two drywall anchors (A). Pre-drill the holes for the drywall anchors (A) and insert the drywall anchors (T) into the ceiling.
6. Attach the mounting plate (A) to the outlet box with screws (B) (size: #8-32N*L0.5"). The side of the mounting plate marked "GND" must face out.
7. Place the woodscrews (U) through the mounting plate and into the drywall anchors (T) to secure the mounting plate (A) to the ceiling.

CONNECTING THE WIRES (Fig. 2)

8. Connect the electrical wire as shown in (Fig.2), making sure that all wire connectors are secured. If your outlet box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture ground wire directly to the circular strap using the green screw provided.

COMPLETING THE INSTALLATION (Fig. 1)


9. Place the Canopy (H) over Mounting plate (A) and fasten with screws (G).
10. Place the glass shade (F) followed by metal ring (G) over the socket, fasten with screw shell (H) by using the tool (I).
11. Install the A19 1*100W (MED BASE) light bulb (not included) in accordance with the fixture's specifications. **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!) (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**

Your installation is now complete. Return power and test the fixture.

Note: Illustration (Fig.1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

Fig. 1

Rod#W30-1-281*6(J)
30-H-281*2(K)

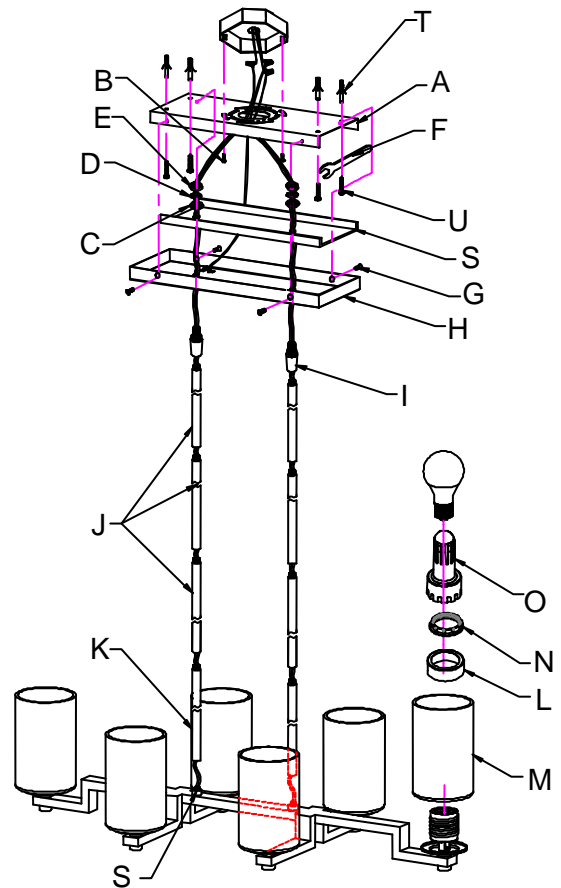

Socket Ring#SKT-RING-26SKT-RING-26

E26 Socket Spanner: WRH-1-51

Fig. 2

